

LF24-3-S US - Damper Actuator

On/Off, Floating Point, Spring Return, 24 V



| Technical Data | |
|-----------------------------------|---|
| Power Supply | 24 VAC ± 20%, 50/60 Hz, 24 VDC ± 10% |
| Power Consumption Running | 2.5 W |
| Power Consumption Holding | 1 W |
| Transformer Sizing | 5 VA (class 2 power source) |
| Shaft Diameter | 3/8" to 1/2" round, centers on 1/2" |
| Electrical Connection | (2) 3ft [1m], 18 GA appliance cables with 1/2" conduit connectors |
| Overload Protection | electronic throughout 0° to 95° rotation |
| Electrical Protection | actuators are double insulated |
| Operating Range Y | on/off, floating point |
| Input Impedance | 1000 Ω (0.6 W) |
| Angle of Rotation | Max. 95° |
| Torque | 35 in-lbs [4 Nm] minimum |
| Direction of Rotation (Motor) | reversible with built-in switch |
| Direction of Rotation (Fail-Safe) | reversible with CW/CCW mounting |
| Position Indication | visual indicator, 0° to 95° (0° is full spring return position) |
| Running Time (Motor) | 150 sec constant, independent of load |
| Running Time (Fail-Safe) | <25 sec @ -4°F to 122°F [-20°C to 50°C], < 60 sec @ -22°F [-30°C] |
| Humidity | max. 95% RH non-condensing |
| Ambient Temperature Range | -22°F to 122°F [-30°C to 50°C] |
| Storage Temperature Range | -40°F to 176°F [-40°C to 80°C] |
| Housing | NEMA 2, IP54 |
| Housing Material | zinc coated steel |
| Agency Listings† | cULus acc. To UL 873 and CAN/CSA C22.2 No. 24-93 |
| Noise Level (Motor) | <30 dB (A) |
| Noise Level (Fail-Safe) | <62 dB (A) |
| Servicing | maintenance free |
| Quality Standard | ISO 9001 |
| Weight | 3.5 lb [1.6 kg] |
| Auxiliary Switch | 1 x SPDT, 3A resistive (0.5A inductive) @ 250 VAC, adjustable 0° to 95° |

†Rated Impulse Voltage 800V, Type of Action 1.AA.B, Control Pollution Degree 3.

Torque min. 35 in-lb, for control of air dampers.


Application

For modulation or On/Off, fail-safe control of dampers in HVAC systems. Actuator sizing should be done in accordance with the damper manufacturer's specifications. The actuator is mounted directly to a damper shaft from 3/8" up to 1/2" in diameter by means of its universal clamp, 1/2" shaft centered at delivery. For shafts up to 3/4" use K6-1 accessory. A crank arm and several mounting brackets are available for applications where the actuator cannot be direct coupled to the damper shaft. Control is floating point from a triac or relay, or On/Off from an auxiliary contact from a fan motor contactor, controller or manual switch.

Operation

The LF series actuators provide true spring return operation for reliable fail-safe application and positive close-off on air tight dampers. The spring return system provides consistent torque to the damper with, and without, power applied to the actuator. The LF series provides 95° of rotation and is provided with a graduated position indicator showing 0 to 95°. The LF24-3-S US uses a brushless DC motor which is controlled by an Application Specific Integrated Circuit (ASIC) and a microprocessor. The microprocessor provides the intelligence to the ASIC to provide a constant rotation rate. The ASIC monitors and controls the brushless DC motor's rotation and provides a digital rotation sensing function to prevent damage to the actuator in a stall condition. The actuator may be stalled anywhere in its normal rotation without the need of mechanical end switches. Power consumption is reduced in holding mode. The LF24-3-S US version is provided with one built-in auxiliary switch. This SPDT switch is provided for safety interfacing or signaling, for example, for fan start-up. The switching function is adjustable between 0° and 95°. The auxiliary switch in the LF24-3-S US is double insulated so an electrical ground is not necessary.


Dimensions (Inches[mm])

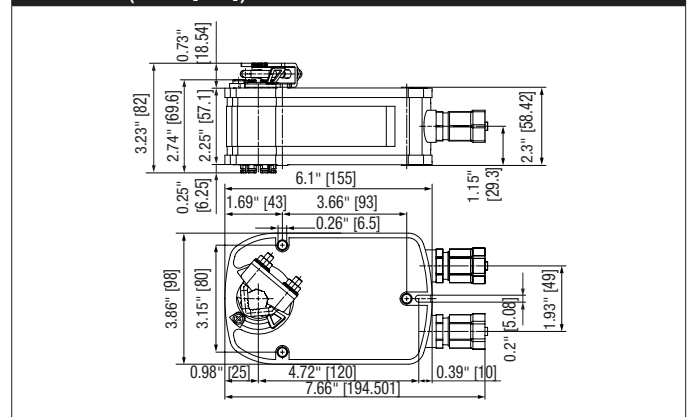


| Accessories | |
|---------------|--|
| AV6-20 | 6.7" shaft extension for 1/4" to 3/4" diameter shafts. |
| IND-LF | LF position indicator. |
| K6 US | Standard LF clamp (3/8" to 1/2"). |
| K6-1 | LF clamp (1/2" to 3/4"). |
| KG10A | Ball joint for 3/8" diameter rod, zinc plated. |
| KG6 | Ball joint for 5/16" diameter rod, zinc plated. |
| KG8 | Ball joint for 5/16" diameter rod, 90°, galvanized steel. |
| KH12 | Univ. crankarm, slot 21/64" w, for 3/4" to 1" dia. shafts. |
| KH6 | Univ. crankarm, slot 1/4" w, for 3/8" to 11/16" dia. shafts. |
| KH8 | Univ. crankarm, slot 21/64" w, for 3/8" to 11/16" dia. shafts. |
| KH-LF | LF crankarm (with 1/2" diameter shaft pass through). |
| KH-LFV | V-bolt Kit for KH-LF. |
| LF-P | Anti-rotation bracket LF. |
| SH10 | Push rod for KG10A ball joint (36" L, 3/8" diameter). |
| SH8 | Push rod for KG6 & KG8 ball joints (36" L, 5/16" diameter). |
| TOOL-06 | 8 mm and 10 mm wrench. |
| ZDB-LF | Angle of rotation Limiter for LF. |
| ZF8-LF | 8x8 mm form fit adaptor for LF. |
| ZG-109 | Right angle bracket for ZS-260. |
| ZG-110 | Stand-off bracket for ZS-260. |
| ZG-112 | LF right angle bracket (4-1/2" H x 5-1/2" W x 2-1/2" D). |
| ZG-DC1 | Damper clip for damper blade, 3.5" width. |
| ZG-DC2 | Damper clip for damper blade, 6" width. |
| ZG-LF112 | LF crankarm adaptor kit (includes ZG-112). |
| ZG-LF2 | LF crankarm adaptor kit (T bracket included). |
| ZG-LMSA-1 | Shaft extension for 3/8" diameter shafts (4" L). |
| ZG-LMSA-1/2-5 | Shaft extension for 1/2" diameter shafts (5" L). |
| ZS-100 | Weather shield - galvanneal (13" L x 8" W x 6" D). |
| ZS-101 | Base plate for ZS-100. |
| ZS-150 | Weather shield - PC w/ foam seal (16" L x 8-3/8" W x 4" D). |
| ZS-260 | Explosion proof housing. |
| ZS-300 | NEMA 4X, 304 stainless steel enclosure. |
| ZS-300-5 | NEMA 4X, 316L stainless steel enclosure. |
| ZS-300-C1 | 1/2" shaft adaptor, standard with ZS-300(-5). |
| ZS-300-C2 | 3/4" shaft adaptor for ZS-300(-5). |
| ZS-300-C3 | 1" shaft adaptor for ZS-300(-5). |
| PS-100 | Actuator power supply and control simulator. |
| ZG-CBLS | Electrical junction box for LF. |
| ZG-X40 | 120 to 24 VAC, 40 VA transformer. |

Typical Specification


Floating point, On/Off spring return damper actuators shall be direct coupled type which require no crank arm and linkage and be capable of direct mounting to a shaft up to a 3/4" diameter and centers on a 1/2" shaft (default). The actuators must be designed so that they may be used for either clockwise or counter clockwise fail-safe operation. Actuators shall have an external direction of rotation switch to reverse control logic. Actuators shall use a brushless DC motor and be protected from overload at all angles of rotation. If required, one SPDT auxiliary switch shall be provided having the capability of being adjustable. Actuators with auxiliary switch must be constructed to meet the requirements for Double Insulation so an electrical ground is not required to meet agency listings. Run time shall be constant and independent of torque. Actuators shall be cULus listed, have a 5 year warranty, and be manufactured under ISO 9001 International Quality Control Standards. Actuators shall be as manufactured by Belimo.

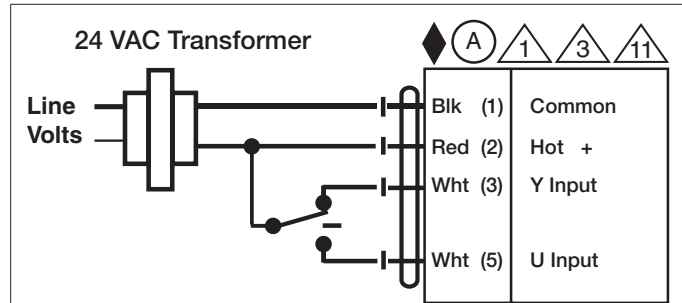


Floating Point

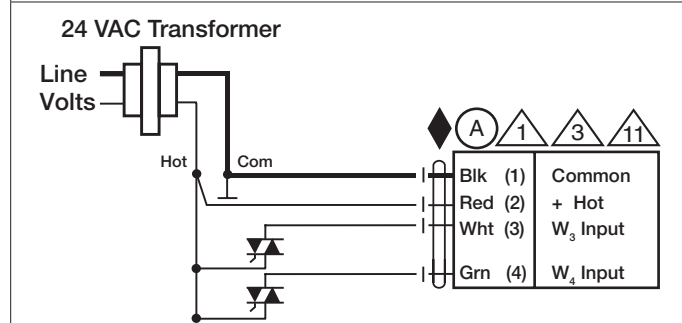

Floating Point - Triac Source

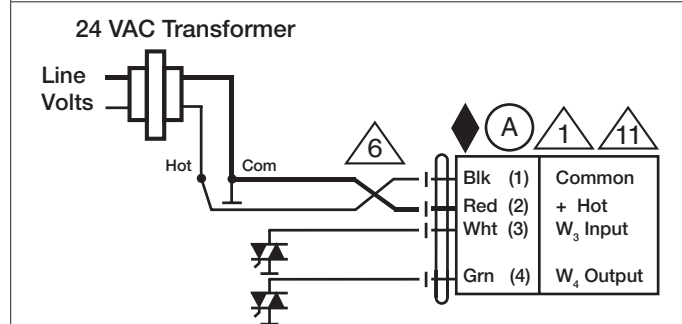

Floating Point - Triac Sink

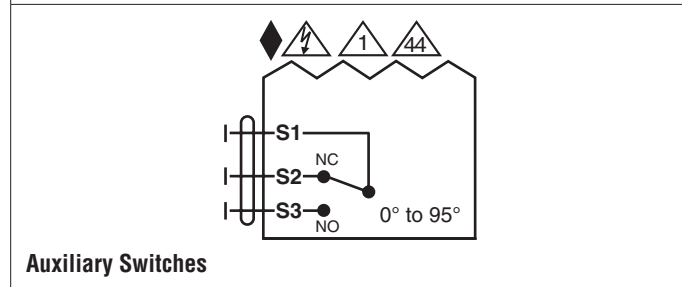

Auxiliary Switches

LF24-3-S US - Damper Actuator

On/Off, Floating Point, Spring Return, 24 V

Wiring Diagrams



WARNING! LIVE ELECTRICAL COMPONENTS!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.



Meets cULus requirements without the need of an electrical ground connection.



Apply only AC line voltage or only UL-Class 2 voltage to the terminals of auxiliary switches. Mixed or combined operation of line voltage/safety extra low voltage is not allowed.



Actuators with appliance cables are numbered.



Provide overload protection and disconnect as required.



Actuators may also be powered by 24 VDC.



Actuators Hot wire must be connected to the control board common. Only connect common to neg. (-) leg of control circuits. Terminal models (-T) have no-feedback.



Actuators may be connected in parallel if not mechanically linked. Power consumption and input impedance must be observed.



One built-in auxiliary switch (1x SPDT), for end position indication, interlock control, fan startup, etc.