



Cleveland Controls

Division of UniControl Inc.

Model DFS-221-198

AIR PRESSURE SENSING SWITCH WITH FIXED SET POINT RANGE

APPLICATION

Model DFS-221-198 is an airflow proving switch designed for duct heater, oven, and other HVAC or Energy Management applications where an open-mounted, nonadjustable switch is desirable. It is especially suitable for surface-mounting in areas where internal access is limited. It is used to sense positive or negative air pressure. The **DFS-221-198** is equipped with convenient barbed sample line connectors that accept 1/8" to 1/4" OD flexible plastic tubing.


General Description & Operation

The plated housing contains a diaphragm and a snap-acting **SPST NO** switch.


The sample line connections are located on both the high and low pressure sides of the diaphragm. The SPST snap action switch operates on pressure rise of $0.05" \text{w.c.} \pm 0.02" \text{w.c.}$ The electrical connection consists of male 1/4-inch (6mm) 90° blade-style quick connect terminals. For additional application and technical information, please contact the sales office.

MOUNTING

(Figure 1)



Mount with the diaphragm in any vertical plane.

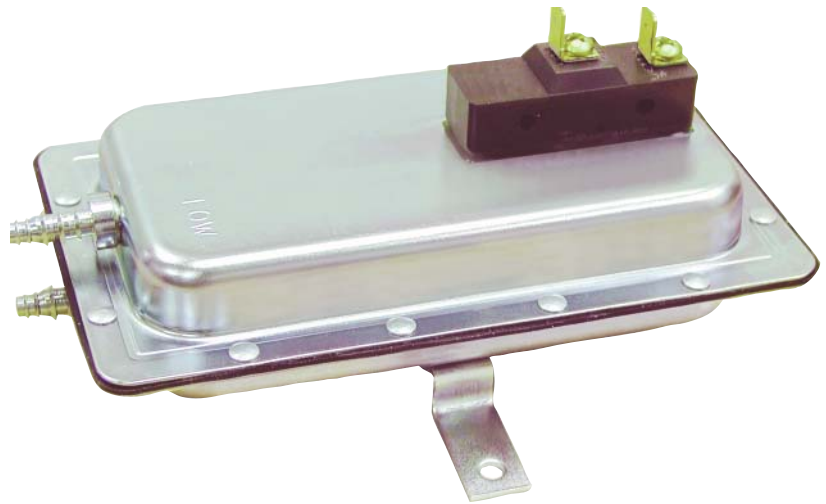

(FIGURE 1)

Select a mounting location which is free from vibration. The **DFS-221-198** must be mounted with the diaphragm in any vertical plane in order to maintain the specified operating set point. Avoid mounting with the sample line connections in the "up" position. Surface mount via the two 3/16" diameter holes on the zinc-plated strap bracket. The mounting holes are 3-7/8" apart.

AIR SAMPLING CONNECTION (FIGURE 2)

The **DFS-221-198** is equipped with two barbed, slip-on sample line connections, situated on either side of the diaphragm as shown in **Figure 2**. These connections are suitable for flexible tubing. Locate the sampling probe a minimum of 1.5 duct diameters downstream from the air source. For sample lines up to 10 feet in length, 1/4" OD tubing is acceptable. For lines up to 20 feet, use 1/4" ID tubing. For lines up to 60 feet, use 1/2" ID tubing. Install the

sampling probe as close to the center of the airstream as possible.

Refer to **Figure 2** to identify the **high pressure inlet (H)** and the **low pressure inlet (L)**. Select one of the five application options listed below, and connect the sample lines as recommended.

Positive pressure only: Connect the sample line to inlet **H**; inlet **L** remains open to the atmosphere.

Negative pressure only: Connect the sample line to inlet **L**; inlet **H** remains open to the atmosphere.

Two Negative Samples: Connect the higher negative sample to inlet **L**. Connect the lower negative sample to inlet **H**.

Two Positive Samples: Connect the higher positive sample to inlet **H**. Connect the lower positive sample to inlet **L**.

One Positive and One Negative Sample: Connect the positive sample to inlet **H**. Connect the negative sample to inlet **L**.



Cleveland Controls

DIVISION OF UNICONTROL INC.
1111 Brookpark Rd
Cleveland OH 44109


Tel: 216-398-0330

Fax: 216-398-8558


Email: saleshvac@unicontrolinc.com

Web page: <http://www.clevelandcontrols.com>

(Figure 2)

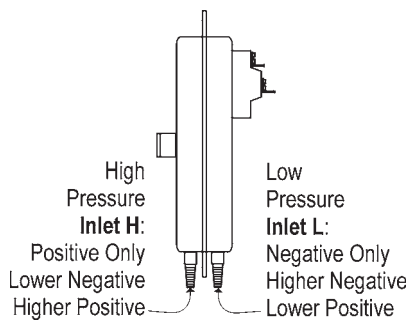

(Figure 3)




ELECTRICAL CONNECTIONS (FIGURES 3 & 4)


Before pressure is applied to the diaphragm, the switch contacts will be in the normally closed (NC) position. Control and alarm functions are wired as shown in **Figure 4**.

(Figure 4)

To prove excessive air flow or pressure:

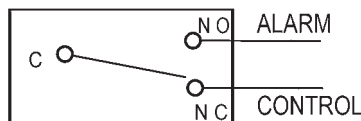

To prove insufficient air flow or pressure:



SPECIFICATIONS

CLEVELAND CONTROLS MODEL DFS-221-198 AIR PRESSURE SENSING SWITCH WITH FIXED SET POINT

Mounting Position: Mount with the diaphragm in any vertical plane to obtain specified operating set point.

Set Point: Fixed to operate on pressure rise at 0.05 ± 0.02 "w.c. (1.27 ± 0.508 mm).

Approximate Switching Differential:
 0.02 ± 0.01 "w.c.
(0.5082 ± 0.254 mm w.c.)

Measured Media: Air, or combustion by-products that will not degrade silicone.

Maximum Pressure: $\frac{1}{2}$ psi (0.03 bar).

Operating Temperature Range:
-40F to 180F (-40 to 82C).

Life: 100,000 cycles minimum at $\frac{1}{2}$ psi maximum pressure each cycle and at maximum rated electrical load.

Electrical Rating:

300 VA pilot duty at 115 to 277 VAC,

15 amps noninductive to 277 VAC, 60 Hz.

Contact Arrangement: SPST-NO.

Electrical Connections: Male $\frac{1}{4}$ " 90° quick-connect spade terminals, Common and NO.

Sample Line Connectors: Two barbed $\frac{1}{4}$ " slip-on connectors.


Sample Line Connections: Connectors accept $\frac{1}{8}$ " to $\frac{1}{4}$ " ID flexible plastic tubing.

Approval: UL, FM, CSA.

Shipping Weight: 1.2 lbs.

Accessories

- Sample line probes.
- Orifice plugs (pulsation dampers).

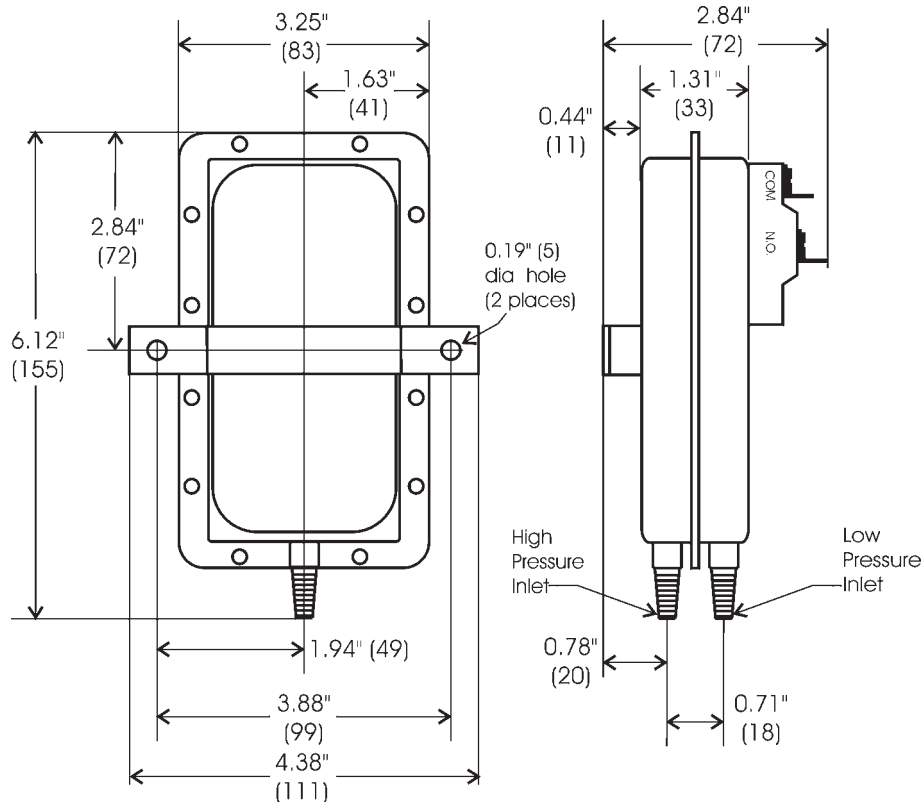

Nominal Dimensions in Inches (Millimeters)