


2087.0

Q 2

Q 2

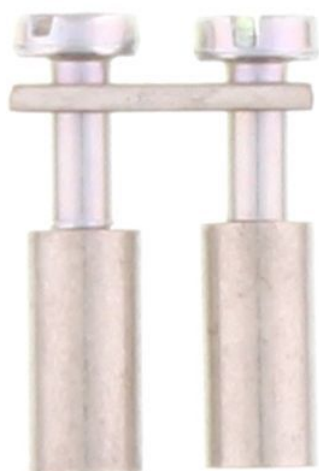

M2.5 

Cross-connector, No. of poles: 2, Mounting type: Can be screwed on, Width: 10.5 mm, Rated cross-section: 4 mm², Colour: natural

Business data

Product description	Cross-connector
Packaging unit	50
Quantity unit	PC
Weight per piece (not including packaging)	2.3
Weight per piece (including packaging)	2.31
Unit of weight	G
Customs number	85389099
Country of origin	DE

2087.0

Q 2

Q 2

Technical Data

Dimensions

Length	4 mm
Width	10.5 mm
Hole height	2.5 mm
Hole diameter	2.8 mm
Hole spacing (mid-point to mid-point)	6.1 mm
Pitch size	6 mm
Slotted hole	✓

Ratings

Voltage with partition, max.	800 V
Voltage without partition, max.	400 V
Rated current	20 A
Rated cross-section	4 mm ²
Contamination degree	3

2087.0

Q 2

Q 2

Technical Data

Connection data

No. of poles	2
Screw head	Slotted
Screw threading	M 2,5
Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.8 Nm

Materials

Material	Copper
Surface	Tin-plated
Surface screw	Galvanized

Further technical data

Mounting type	Screwable
Number of bridged terminals	2

2087.0

Q 2

Q 2

Media

M2.5



2087.0

Q 2

Q 2

Accessories

Screw driver



Screwdriver with bare blade, Colour: Black-grey

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1086.0	SDB 0,6x3,5	4044211014797	1 PC
