


2752.2

QI 4 YE

QI 4 YE

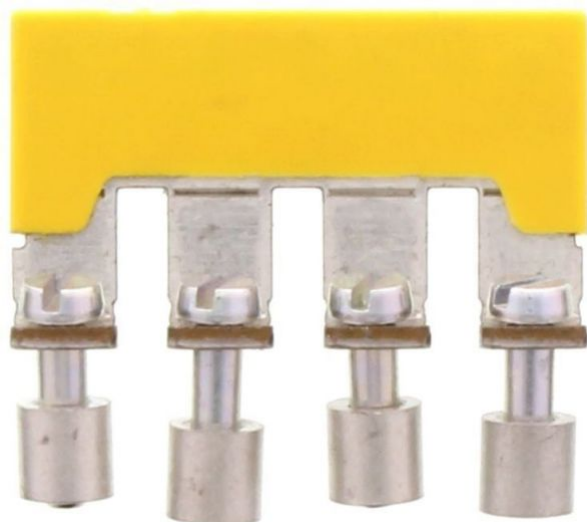

M3 

Insulated cross-connector, No. of poles: 4, Mounting type: Can be screwed on, Width: 28.8 mm, Colour: Yellow

Business data

Product description	Insulated cross-connector
Packaging unit	20
Quantity unit	PC
Weight per piece (not including packaging)	9.4
Weight per piece (including packaging)	9.5
Unit of weight	G
Customs number	85389099
Country of origin	DE

2752.2
QI 4 YE
QI 4 YE

Technical Data

Dimensions

Length	2.4 mm
Width	28.8 mm
Pitch size	8 mm

Ratings

Voltage with partition, max.	800 V
Voltage without partition, max.	400 V
Rated current	57 A
Contamination degree	3

Connection data

No. of poles	4
Screw head	Slotted
Screw threading	M 3
Tightening torque, min.	0.5 Nm
Tightening torque, max.	1 Nm

2752.2

QI 4 YE

QI 4 YE

Technical Data

Materials

Material	Copper
Surface	Tin-plated
Insulation housing	Polyamide 6.6
Flammability class UL 94	V-2
Working temperature, min.	-40 °C
Working temperature, max.	105 °C

Further technical data

Mounting type	Screwable
Insulation available	✓
Number of bridged terminals	4

2752.2

QI 4 YE

QI 4 YE

Media

M3



2752.2
QI 4 YE
QI 4 YE

Accessories

Screw driver



Screwdriver with bare blade, Colour: Black-grey

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1086.0	SDB 0,6x3,5	4044211014797	1 PC
