

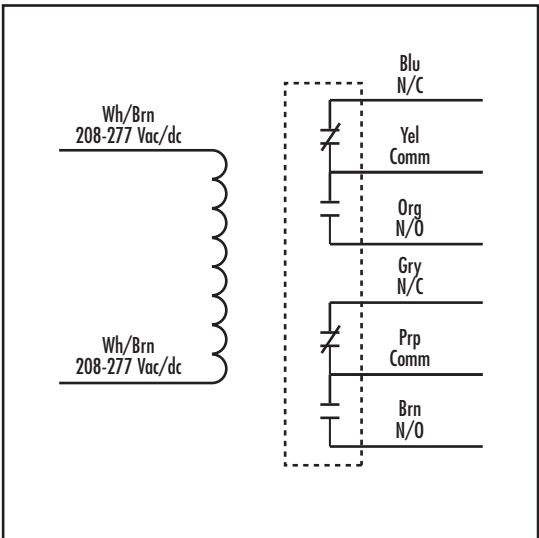


<http://www.functionaldevices.com>

RIB02P Enclosed Relay 20 Amp DPDT with 208-277Vac Coil																							
  <p>MADE IN U.S.A.</p> <p>Functional Devices, Inc. A600A 2003</p>	<p><b>CONTACT RATINGS</b></p> <table border="0"> <tr><td>20 Amp resistive</td><td>300 Vac</td></tr> <tr><td>20 Amp resistive</td><td>28 Vdc, 15 Vdc</td></tr> <tr><td>15 Amp resistive</td><td>600 Vac</td></tr> <tr><td>1 HP</td><td>120 Vac</td></tr> <tr><td>2 HP</td><td>240-277 Vac</td></tr> <tr><td>3 HP</td><td>480-600 Vac</td></tr> <tr><td>20 Amp Ballast</td><td>277-480 Vac</td></tr> <tr><td>770 VA Pilot Duty</td><td>120 Vac</td></tr> <tr><td>1,158 VA Pilot Duty</td><td>240 Vac</td></tr> <tr><td>1,110 VA Pilot Duty</td><td>277 Vac</td></tr> <tr><td>1,640 VA Pilot Duty</td><td>480 Vac</td></tr> </table> <p><b>COIL CURRENT</b> 95 mA @ 208-277 Vac</p> <p><b>COIL VOLTAGE INPUT</b> 208-277 Vac 50-60 Hz DROP OUT = 60 Vac PULL IN = 160 Vac</p>	20 Amp resistive	300 Vac	20 Amp resistive	28 Vdc, 15 Vdc	15 Amp resistive	600 Vac	1 HP	120 Vac	2 HP	240-277 Vac	3 HP	480-600 Vac	20 Amp Ballast	277-480 Vac	770 VA Pilot Duty	120 Vac	1,158 VA Pilot Duty	240 Vac	1,110 VA Pilot Duty	277 Vac	1,640 VA Pilot Duty	480 Vac
20 Amp resistive	300 Vac																						
20 Amp resistive	28 Vdc, 15 Vdc																						
15 Amp resistive	600 Vac																						
1 HP	120 Vac																						
2 HP	240-277 Vac																						
3 HP	480-600 Vac																						
20 Amp Ballast	277-480 Vac																						
770 VA Pilot Duty	120 Vac																						
1,158 VA Pilot Duty	240 Vac																						
1,110 VA Pilot Duty	277 Vac																						
1,640 VA Pilot Duty	480 Vac																						
<p><b>GENERAL SPECIFICATIONS</b></p> <p># Relays &amp; Contact Type: One (1) DPDT Continuous Duty Coil            Expected Relay Life: 10 million cycles minimum mechanical            Operating Temperature: -30 to 140° F            Operate Time: 18mS            Relay Status: LED On = Activated            Dimensions: 4" x 4" x 1.8" with 1/2" NPT nipple            Wire Length: 16", 600V Rated            Approvals: UL Listed, UL916, UL864, C-UL Canada                              California State Fire Marshal            Housing Rating: Plenum, NEMA 1            Gold Flash: Yes            Override Switch: No</p>																							
																							

**NOTES:**