


KZ-4000 Series

General Purpose Relay

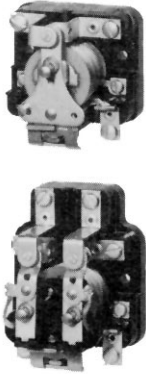

Description

KZ-4000 General Purpose Relays are designed to control large electrical loads from lower-powered sources.

Features

- Single-Pole, Double-Throw (SPDT) and Double-Pole, Double-Throw (DPDT) models available
- self-wiping silver alloy contacts rated for 25 Amp resistive loads
- relay contacts are an integral part of the assembly
- all models are UL Listed and CSA Approved

Applications

The KZ-4000 General Purpose Relay is used in applications requiring an SPST or DPDT output.

Repair Parts

Replace unit.

To Order

Specify the code number from the following selection chart.

Selection Chart

Code Number	Description					
	Contacts	Coil Voltage	Coil Ratings	Pilot Duty Ratings	Contact Load Ratings	Agency Listings
KZ-4000-4	SPDT	24	10 VA at 24, 120, or 240 Volts, 50/60 Hz	690 VA at 120 or 240 Volts, 50/60 Hz	25 Amps (resistive) or 1 HP (746 Watts) at 120 or 240 Volts, 50/60 Hz	UL Listed and CSA Approved
KZ-4000-5	SPDT	120				
KZ-4000-6	SPDT	240				
KZ-4000-7	DPDT	24				
KZ-4000-8	DPDT	120				

Accessories

Code Number	Description
BZ-1000-11	Equipment Enclosure