

<http://www.functionaldevices.com>

RIBMU1S

4" Track-Mount Relay 15 Amp SPST-NO + Override with 10-30Vac/dc/120Vac Coil



Functional Devices, Inc. A600A 2003

GENERAL SPECIFICATIONS

Relays & Contact Type: One (1) SPST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Operate Time: 20mS
Relay Status: LED On = Activated
Dimensions: 1.275" x 4" x 1.75"
Approvals: UL Listed, UL916, UL864, C-UL Canada
California State Fire Marshal
Gold Flash: Yes
Override Switch: Yes

CONTACT RATINGS

15 Amp Resistive	150 Vac
10 Amp Resistive	277 Vac
480 VA Pilot Duty	277 Vac
480 VA Ballast	277 Vac
600 Watt Tungsten	120 Vac N.O.
240 Watt Tungsten	120 Vac N.C.
1/3 HP for N.O.	120-240 Vac
1/6 HP for N.C.	120-240 Vac
1/4 HP for N.O.	277 Vac
1/8 HP for N.C.	277 Vac

COIL CURRENT


30 mA @ 10 Vac	12 mA @ 10 Vdc
32 mA @ 12 Vac	14 mA @ 12 Vdc
42 mA @ 24 Vac	16 mA @ 24 Vdc
50 mA @ 30 Vac	18 mA @ 30 Vdc
25 mA @ 120 Vac	

COIL VOLTAGE INPUT

10-30 Vac / dc, 120 Vac; 50-60 Hz
DROP OUT = 2.1 Vac / 2.8 Vdc
PULL IN = 9 Vac / 10 Vdc

NOTES

Can be ordered Normally Closed by adding
"-NC" to the end of the model number.

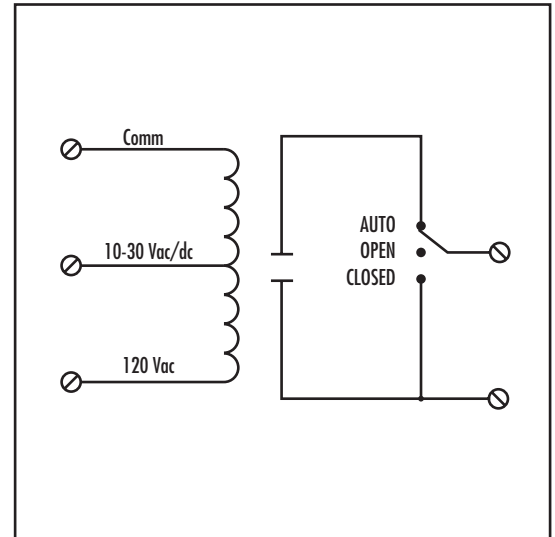

NOTES: