

## RIBMU1C

### 15 AMP PILOT CONTROL RELAY

4.00" Track Mount Relay 15 Amp SPDT with 10-30 Vac/dc/120 Vac Coil



#### SPECIFICATIONS

**# Relays & Contact Type:** One (1) SPDT Continuous Duty Coil  
**Expected Relay Life:** 10 million cycles minimum mechanical  
**Operating Temperature:** -30 to 140° F  
**Operate Time:** 20mS  
**Relay Status:** LED On = Activated  
**Dimensions:** 1.250" x 4.000" x 1.750"  
**Track Mount:** 4.000", See MT4 Series on page 148  
**Approvals:** UL Listed, UL916, UL864, C-UL  
 California State Fire Marshal, CE  
**Gold Flash:** Yes  
**Override Switch:** No

#### Contact Ratings:


15 Amp Inductive @ 150 Vac  
 15 Amp Resistive @ 150 Vac, 28 Vdc  
 10 Amp Resistive @ 120-277 Vac, 28 Vdc  
 480 VA Pilot Duty @ 240-277 Vac  
 480 VA Ballast @ 277 Vac  
 600 Watt Tungsten @ 120 Vac N/O  
 240 Watt Tungsten @ 120 Vac N/C  
 1/3 HP for N/O @ 120-240 Vac  
 1/6 HP for N/C @ 120-240 Vac  
 1/4 HP for N/O @ 277 Vac  
 1/8 HP for N/C @ 277 Vac

#### Coil Current:

30 mA @ 10 Vac 12 mA @ 10 Vdc  
 32 mA @ 12 Vac 14 mA @ 12 Vdc  
 42 mA @ 24 Vac 16 mA @ 24 Vdc  
 50 mA @ 30 Vac 18 mA @ 30 Vdc  
 25 mA @ 120 Vac

#### Coil Voltage Input:

10-30 Vac/dc ; 120 Vac ; 50-60 Hz  
 Drop Out = 2.1 Vac / 2.8 Vdc  
 Pull In = 9 Vac / 10 Vdc

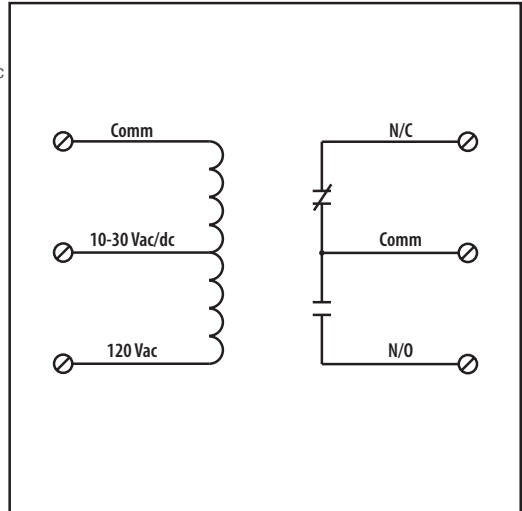

## NOTES