

## RIBMU1S

### 15 AMP PILOT CONTROL RELAY

4.00" Track Mount Relay 15 Amp SPST-N/O + Override with 10-30 Vac/dc/120 Vac Coil



#### SPECIFICATIONS

# Relays & Contact Type: One (1) SPST Continuous Duty Coil  
Expected Relay Life: 10 million cycles minimum mechanical  
Operating Temperature: -30 to 140° F  
Operate Time: 20ms  
Relay Status: LED On = Activated  
Dimensions: 1.275" x 4.000" x 1.750"  
Track Mount: 4.000", See MT4 Series on page 148  
**MT4 Mounting Track Sold Separately**  
Approvals: UL Listed, UL916, UL864, C-UL  
California State Fire Marshal, CE  
Gold Flash: Yes  
Override Switch: Yes

#### Contact Ratings:

15 Amp Resistive @ 150 Vac  
10 Amp Resistive @ 277 Vac  
480 VA Pilot Duty @ 277 Vac  
480 VA Ballast @ 277 Vac  
600 Watt Tungsten @ 120 Vac N/O  
240 Watt Tungsten @ 120 Vac N/C  
1/3 HP for N/O @ 120-240 Vac  
1/6 HP for N/C @ 120-240 Vac  
1/4 HP for N/O @ 277 Vac  
1/8 HP for N/C @ 277 Vac

#### Coil Current:


30 mA @ 10 Vac	12 mA @ 10 Vdc
32 mA @ 12 Vac	14 mA @ 12 Vdc
42 mA @ 24 Vac	16 mA @ 24 Vdc
50 mA @ 30 Vac	18 mA @ 30 Vdc
25 mA @ 120 Vac	

#### Coil Voltage Input:

10-30 Vac/dc ; 120 Vac ; 50-60 Hz  
Drop Out = 2.1 Vac / 2.8 Vdc  
Pull In = 9 Vac / 10 Vdc

#### Notes:

- » Order Normally Closed by adding "-NC" to end of model number
- » Order with Momentary Override Switch by adding "-MNO" to end of model number

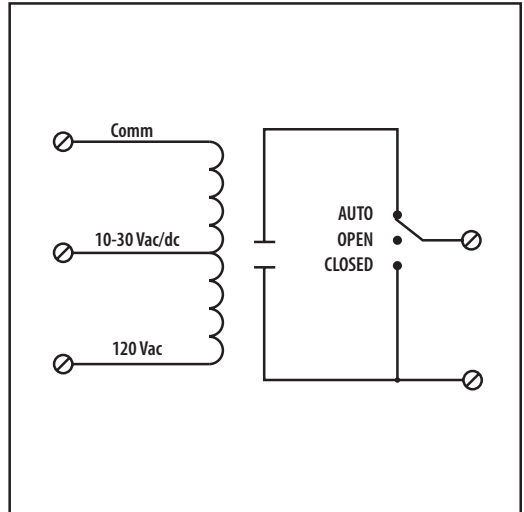

## NOTES