

TR50VA004


TRANSFORMER

Transformer 50 VA, 480/277/240/120 to 24 Vac, Circuit Breaker, Foot and Dual Threaded Hub Mount



SPECIFICATIONS

- VA Rating: 50
- Frequency: 50/60 Hz
- Mounting: Foot & Dual Threaded Hubs
- Over Current Protection: Circuit Breaker
- Dimensions: 3.000" x 2.525" x 3.475"
(w/ .500" NPT Hubs)
- Wire Length: 9.5" Typical w/ .5" Strip
- Operating Temperature: -30 to 140° F
- MTBF: 100,000 Hours @ 77° F
- Construction: Split-Bobbin
- Weight: 3.04 lbs.
- Approvals: Class II UL1585 Listed, C-UL, CE, RoHS



Mounting Hole =
.350" x .175"



PRIMARY WIRES

- Gry - 480 Vac
- Brn - 277 Vac
- Org - 240 Vac
- Wht - 120 Vac
- Blk - Comm

SECONDARY WIRES

- Yel/Wht - 24 Vac*
- Yel - Comm

*Secondary Yel/Wht wire in phase with Primary Blk wire.

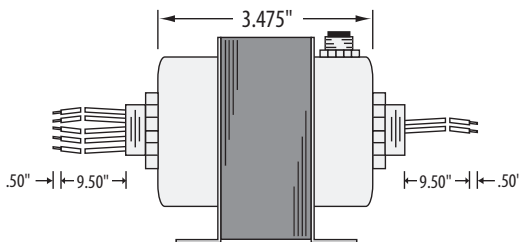

NOTES