

- ✓ BACnet
- ✓ CEA-709
- KNX

- ✓ Modbus
- ✓ MP-Bus
- ✓ OPC



Datasheet #89056920



LIOB-585 I/O Controllers are IP-enabled, compact, programmable automation stations for LonMark Systems and BACnet/IP networks with physical inputs and outputs and integrated graphical visualization.

Communication

The LIOB-585 I/O Controller is equipped with two Ethernet ports including a built-in Ethernet switch. This allows for building a daisy chained line topology of up to 20 devices, which reduces costs for network installation. Dual Ethernet port devices also allow the setup of a redundant Ethernet installation (ring topology), which increases reliability. The redundant Ethernet topology is enabled by the Rapid Spanning Tree Protocol (RSTP), which is supported by most managed switches.

Technology data points are automatically exposed as OPC tags for higher level OPC client applications or L-WEB system via the integrated OPC server providing SSL encrypted web services (OPC XML-DA) or UA Secure Conversation (OPC UA). The L-IOB I/O Controllers further allow data exchange over global connections (network-wide data exchange), offer AST™ functions (Alarming, Scheduling, and Trending), store custom graphic pages for visualization in LWEB-802/803, and can be seamlessly integrated in the LWEB-900 Building Management System. LIOB-585 I/O Controllers implement the BACnet Building Controller (B-BC) profile and are BTL certified.

IoT Integration

The IoT function (Node.js) allows connecting the system to almost any cloud service, either for uploading historical data to analytics services, delivering alarm messages to alarm processing services or operating parts of the control system over a cloud service (e.g., scheduling based on Web calendars or booking systems). Processing Internet information such as weather data in forecast-based control is also possible. Finally, the JavaScript kernel also allows implementing serial protocols to non-standard equipment in primary plant control.

Local Operation and Override

All L-IOB I/O Controllers are equipped with an LCD display (128x64) with backlight and jog dial for manual local operation and override. Device and data point information is displayed in text form and via graphical symbols.

Unitary and Terminal Controller

The LIOB-585 is designed to efficiently implement unitary and terminal applications in a compact form factor. The integrated differential pressure sensor, its local I/O, and the built-in MP-Bus port provide connectivity for all unitary and terminal equipment. In addition, the RS-485 port allows connection of L-STAT room operator panels for temperature and air quality measurement and user interaction.

L-IOB I/O Controller

LIOB-585

Features

- Automation station with physical inputs and outputs
- Programmable with L-STUDIO IEC 61131-3 and IEC 61499
- Programmable with L-LOGICAD
- 128x64 graphic display with backlight
- Local and remote access to information about device status and data points
- Manual operation using the jog dial or VNC client
- Alarming, Scheduling, and Trending (AST™)
- Node.js support* for easy IoT integration (e.g. Google calendar, Alexa & friends, multimedia equipment,...)
- Event-driven e-mail notification
- Math objects to execute mathematical operations on data points
- Stores customized graphical pages
- Visualization of customized graphical pages through LWEB-900 (Building Management), LWEB-803 (Monitoring and Control), or LWEB-802 (Web Browser)
- Support of the L-STAT Room Operator Panel
- Built-in OPC XML-DA and OPC UA server
- Dual Ethernet/IP interface
- Access to network statistics
- Compliant with ANSI/ASHRAE 135-2012 and ISO 16484-5:2012 standard
- Supports BACnet MS/TP and BACnet/IP
- BACnet Client Function (Write Property, Read Property, COV Subscription)
- BACnet Client Configuration with configuration tool (scan and EDE import)
- B-BC (BACnet Building Controller) functionality, BTL certified
- Compliant with CEA-709, CEA-852, and ISO/IEC 14908 Standard (LonMark System)
- Supports IP-852 (Ethernet/ IP)
- Support of dynamically created or static NVs
- Support of user-defined NVs (UNVTs) and Configuration Properties (SCPTs, UCPTs)
- Integrated BACnet/ IP to BACnet MS/ TP Router including BBMD as well as Slave-Proxy functionality
- Gateway functions including Smart Auto-Connect™
- Integrated web server for device configuration and monitoring data points
- Connection to EnOcean wireless devices via LENO-80x Interface
- Supports WLAN through LWLAN-800 Interface
- Supports LTE through LTE-800 Interface
- Stores user-defined project documentation
- Integration of damper actuator via MP-Bus
- Differential pressure sensor

General Specifications

| | | |
|----------------------|--|---|
| Dimensions (mm) | 107 x 100 x 75 (L x W x H), DIM057 | |
| Installation | DIN rail mounting following DIN 43880, top hat rail EN 50022 | |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) | |
| Power supply | 24 VDC / 24 VAC ±10 % via LPOW-2415B, or with an external power supply | |
| Program cycle time | Down to 10 ms | |
| Interface | 2 x Ethernet (100Base-T): Web services (OPC XML-DA, OPC UA), LonMark IP-852, BACnet/IP**, Modbus TCP (Master or Slave), HTTP, FTP, SSH, HTTPS, Firewall, VNC, SNMP 2 x USB-A: WLAN (needs LWLAN-800), EnOcean (needs LENO-80x), LTE (needs LTE-800) | 1 x RS-485 (ANSI TIA/EIA-485): BACnet MS/TP** or Modbus RTU/ASCII (Master or Slave) or L-STAT Room Operator Panels 1 x MP-Bus |

** Router between BACnet/IP and BACnet MS/TP

Specifications

| | |
|------------------------------|--|
| Type | LIOB-585 |
| Power consumption | 4.5 W |
| Universal Input (UI) | 6 |
| Digital Input (DI) | - |
| Analog Output (AO) | 2 |
| Digital Output (DO) | 5 (5 x Triac 0.5 A) |
| Digital Output specification | Please refer to the " General Input and Output Specification of LOYTEC devices " at the end of the L-IOB section for more details. |
| Differential Pressure Sensor | 0–500 Pa |

*requires L-IOT1 software license


| Resource limits | | | |
|---------------------------------|-----------------------------------|------------------------------|--------------------------|
| Total number of data points | 10 000 | LonMark Calendars | 1 (25 calendar patterns) |
| OPC data points | 1 000 | LonMark Schedulers | 10 |
| BACnet objects | 500 (analog, binary, multi-state) | LonMark Alarm Servers | 1 |
| BACnet client mappings | 500 | E-mail templates | 50 |
| BACnet calendar objects | 25 | Math objects | 50 |
| BACnet scheduler objects | 10 (64 data points per object) | Alarm logs | 10 |
| BACnet notification classes | 32 | Modbus data points | 300 |
| Trend logs (BACnet or generic) | 256 (4 000 000 entries, ≈ 60 MB) | Connections (Local / Global) | 500 / 100 |
| Total trended data points | 256 | Number of L-WEB clients | 32 (simultaneously) |
| CEA-709 network variables (NVs) | 500 | L-STAT Room Operator Panels | 8 |
| CEA-709 Alias NVs | 500 | EnOcean devices | 10 |
| CEA-709 External NVs (polling) | 500 | EnOcean data points | 100 |
| CEA-709 address table entries | 256 (non-ECS mode: 15) | MP-Bus devices (per channel) | 8 (16 MPL) |

| Runtime licenses | |
|--------------------|--|
| Type | LIOB-585 |
| Programming, Tools | L-STUDIO software (IEC 61131-3 or IEC 61499), L-LOGICAD, LINX Configurator |
| License | L-STUDIO: included L-LOGICAD: included |

| Order number | Product description |
|-------------------|---|
| LIOB-585 | L-IOB I/O Controller: 6 UI, 2 AO, 5 DO (5 x Triac 0.5 A), 1 Pressure Sensor |
| L-ACT101-MP | Actuator 5/8", 5 Nm, 45in-lb, MP-Bus cable |
| L-ACT102-MP | Actuator 3/4", 5 Nm, 45in-lb, MP-Bus cable |
| L-ACT-FRAME1 | Mounting frame |
| LPOW-2415B | Power supply unit with power connector 24 VDC, 15 W |
| L-IOT1 | Add-on Software License to enable IoT functionality on LIOB-585/586/588/589, LIOB-AIR, and LINX-102/103/202/203 |
| L-TEMP2 | External temperature sensor (NTC10K) for use with L-IOB Universal Inputs |
| LENO-800 | EnOcean Interface 868 MHz Europe |
| LENO-801 | EnOcean Interface 902 MHz USA/Canada |
| LENO-802 | EnOcean Interface 928 MHz Japan |
| LWLAN-800 | Wireless LAN Interface IEEE 802.11bgn |
| LTE-800 | USB LTE Interface |
| LSTAT-800-G3-Lx | Room Operator Panel, black front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, Buttons (Lx) |
| LSTAT-801-G3-Lx | Room Operator Panel, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (Lx) |
| LSTAT-802-G3-Lx | Room Operator Panel, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (Lx) |
| LSTAT-800-G3-L20x | Room Operator Panel, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, IR receiver, Buttons (Lx) |
| LSTAT-801-G3-L20x | Room Operator Panel, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (Lx) |
| LSTAT-802-G3-L20x | Room Operator Panel, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (Lx) |
| LSTAT-80x-CUSTOM | Customized Room Operator Panel, minimum quantity 100 pieces, enclosure G1: silver, G2: black, G3: white; custom print Lx, EnOcean optional, including 2 working samples, typical lead time 10 weeks |

Dimensions of the devices in mm and [inch]

DIM057 LIOB-585

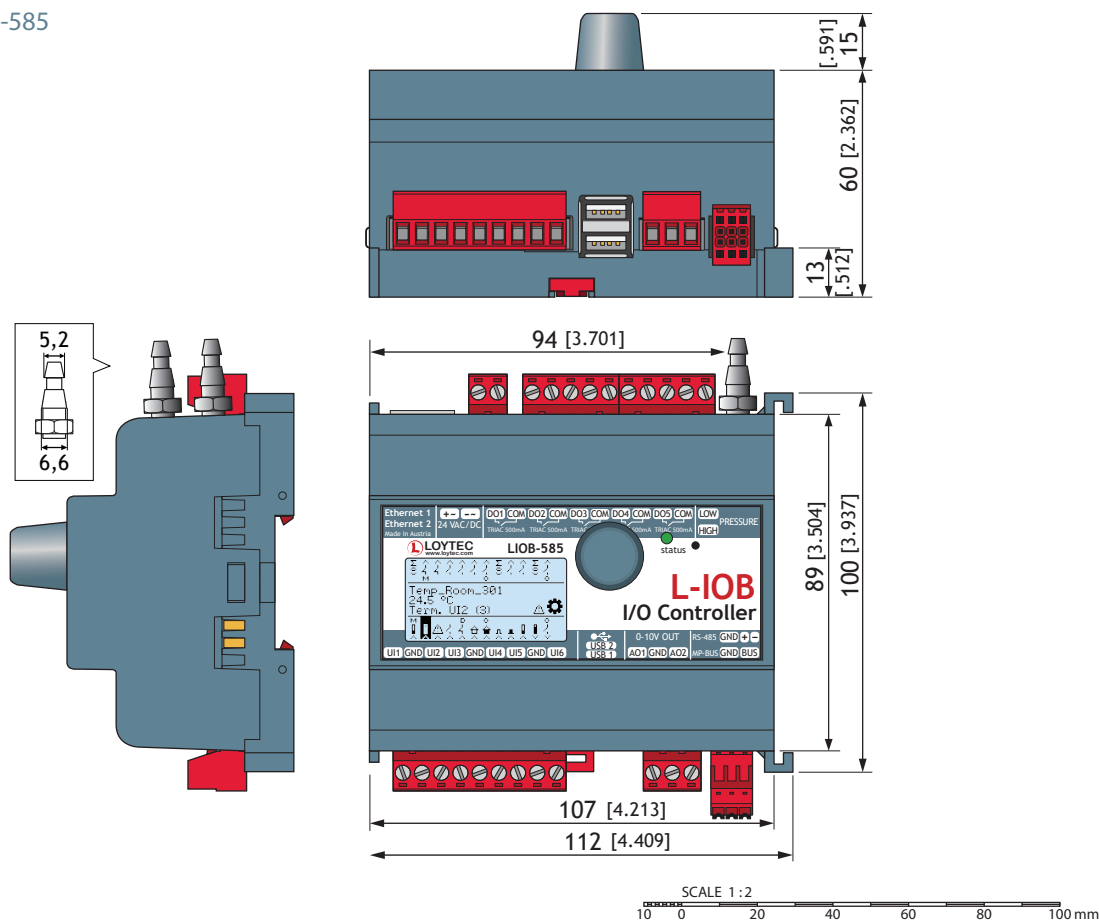

DIM058 DVP16SM11N

