

Valves

Series TC-4
Test-N-Check® Valves



- For hot water boilers
- Simplifies ASME CSD-1a. code mandated testing of low water cut-offs by eliminating the need to drain the system
- Includes one upper and one lower valve for mounting at crosses in equalizing lines
- Restricts water flow when the low water cut-off's blow down valve is open
- Adjustable built-in vacuum breaker in upper valve provides rapid evacuation of water from the float chamber
- 1" NPT
- Maximum temperature 250°F (121°C)
- Maximum pressure 160 psi (11 kg/cm²)

Dimensions, in. (mm)

A NPT	B	C	D
1	1½ (38)	1½ (38)	5 (125)


E NPT	F NPT	G	
		Upper	Lower
1	1	5¼ (133)	3⅞ (78)

Ordering Information

Model Number	Part Number	Description	Weight lbs. (kg)
TC-4	195000	Test-N-Check Valves, set of 2	5.3 (.4)



Series TC-4
Upper Valve

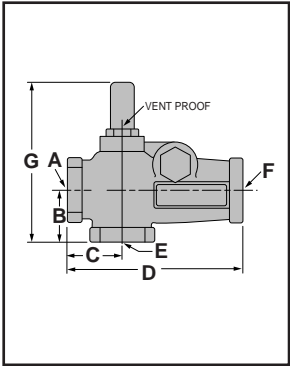

Series TC-4
Lower Valve

