



Air Handling Cable Ties

AL-07-50-AH-35-C

Quantity: 100

Tensile Rating: 50 lb/222 n

Min. Bundle Dia.: .06"/1.57mm

Max. Bundle Dia.: 1.87"/47.62mm

Length: 7.56"/192.07mm

Strap Width: .18"/4.57mm

Max. Operating Temp.: 185°F (85°C)

Min. Operating Temp.: -40°F (-40°C)


Min. Installation Temp.: -4°F (-20°C)

Material: Burgundy Nylon 6/6

UL Rated: Indoor Use

Suitable for use in Air Handling Spaces
(Plenums) in accordance with Section
300.22 (C) and (D) of the National
Electrical Code and Rules 12-010 (3), (4),
and (5) and 12-020 of the Canadian
Electrical Code, Part 1

Ideal storage in original sealed package, in 50% RH,
at 70°F/21°C, out of direct sunlight, until installation.

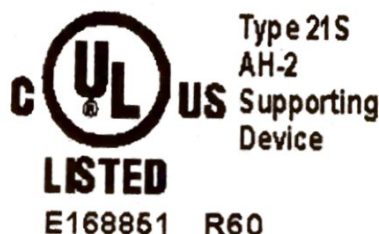

MADE IN USA



Air Handling Cable Ties

AL-11-50-AH-35-C

Quantity: 100

Tensile Rating: 50 lb/222 n

Min. Bundle Dia.: .06"/1.57mm

Max. Bundle Dia.: 3.06"/77.77mm

Length: 11.25"/285.75mm

Strap Width: .18"/4.57mm

Max. Operating Temp.: 185°F (85°C)

Min. Operating Temp.: -40°F (-40°C)

Min. Installation Temp.: -4°F (-20°C)

Material: Burgundy Nylon 6/6

UL Rated: Indoor Use

Suitable for use in Air Handling Spaces
(Plenums) in accordance with Section
300.22 (C) and (D) of the National
Electrical Code and Rules 12-010 (3), (4),
and (5) and 12-020 of the Canadian
Electrical Code, Part 1

Ideal storage in original sealed package, in 50% RH,
at 70°F/21°C, out of direct sunlight, until installation.

