


HAZARDOUS LOCATION

Configuration Code XP03
**Hazardous Location Explosion-Proof-Certified,
 RTD Assemblies with Thermowells**

Explosion-Proof RTD Assemblies with Thermowells are made for use in U.S. and Canadian hazardous areas. They are designed to extinguish flames inside the device, eliminating the potential for ignition of flammable mixtures in the surrounding atmosphere. FM and CSA certified assemblies, dependent on connection head type, meet XP Class I Division I & II; Groups A, B, C, D; DIP Class II Division I; Groups E, F, G; Class III; Type 4/4X. The required thermowell is available in standard, heavy-duty, and flanged constructions. The assemblies feature 316 stainless steel sheaths. They are available with aluminum or stainless steel explosion-proof connection heads.

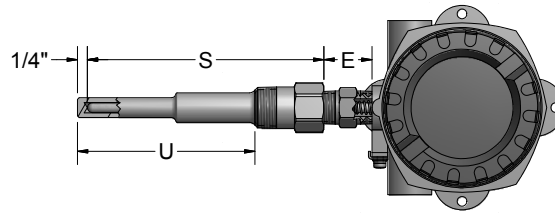

ORDER CODES

**Example
 Order Number:**

XP - **R1T185L** **48** **3** - Select Thermowell Part # from Thermowell Section - **SC** - **8HN** **75T-642B**, **I** Select Type and Range from back of Section

1-0 Agency Approval

CODE	DESCRIPTION
XP	FM/CSA explosion-proof-certified assembly

2-0 100 Ω Platinum RTD Elements α = 0.003 85 °C⁻¹

CODE		TOLERANCE ^[1]	TEMP. RANGE
SINGLE	DUPLEX		
R1T185L	R1T285L	Grade B	(-200 to 200) °C
R5T185L	R5T285L	(1/5) Class B	(-30 to 150) °C
RBF185L	RBF285L	Class B	(-50 to 200) °C
RAF185L	RAF285L	Class A	(-30 to 200) °C
R1T185H	R1T285H	Grade B	(-200 to 600) °C
RAT185H	RAT285H	Class A	(-100 to 450) °C

[1] Refer to RTD tolerance information in the General Information section for calculations to determine specific tolerance at temperature.

2-1 Sheath Diameters 316 SS

CODE	DIAMETERS (inches)
48	1/4

2-2 Element Connection

CODE	DESCRIPTION
2	2-wire
3	3-wire
4 ^[1]	4-wire

[1] Not available in duplex or with 440 Series Transmitter

3-0 Thermowell

Select thermowell part number from Thermowell Section.

5-1 Head Terminations

CODE	DESCRIPTION
74	DIN form B aluminum explosion-proof head
75T-642B	(4 to 20) mA HART® Field Transmitter with aluminum explosion-proof housing
76T82-D10	(4 to 20) mA dual input HART® Field Transmitter with digital display and explosion-proof aluminum housing
77T-662C	(4 to 20) mA HART® Field Transmitter with dual cavity explosion-proof aluminum housing
93	Aluminum explosion-proof head
94	316L stainless steel explosion-proof head

5-2 Options

SB	1/2" NPT conduit reducer bushing
I	Stainless steel tag
T-440 ^[1]	(4 to 20) mA head-mounted transmitter
T-441	(4 to 20) mA isolated head-mounted transmitter
T-442	(4 to 20) mA HART® isolated head-mounted transmitter
T82-00	(4 to 20) mA dual input, isolated HART® head-mounted transmitter

See transmitter ordering information in back of section.

[1] Not available with option 74.

5-0 Head Mounting Fittings

CODE	DESCRIPTION	CODE	DESCRIPTION
<i>STEEL FITTINGS</i>		<i>316SS FITTINGS</i>	
6HN	1/2" x 1/2" NPT hex nipple 1" length	8HN	1/2" x 1/2" NPT hex nipple 1" length
6PN ₋	1/2" NPT pipe nipple (specify "E" length in inches)	8PN	1/2" NPT pipe nipple (specify "E" length in inches)
6XU _{-[1]}	1/2" NPT union/nipple (specify "E" length in inches)	8XU _{-[1]}	1/2" NPT union/nipple (specify "E" length in inches)

[1] 3 1/2" Minimum length required. Maximum allowable "E" length is 9"

4-0 Element Options

CODE	DESCRIPTION
SL ^[1]	Spring-loaded element
SC	Self-contained, spring-loaded element

[1] Not available with option 75T, 76T, or 77T

HART® is a registered trademark of the HART Communication Foundation.

