

ROOM AIR CONDITIONER CONTROLS

C12/2001 RESISTANCE HEAT LOCKOUT THERMOSTAT


This control provides accurate temperature adjustment to turn on heat in response to outdoor temperature.

ELECTRICAL RATING

RATING	24V	120V	240V	277V
FULL LOAD AMPS	–	20	20	16
LOCKED ROTOR AMPS	–	80	80	60
PILOT DUTY (VA)	240	240	240	240
RESISTIVE LOAD AMPS	–	25	25	16

ORDERING DATA

UNI-LINE ORDER NO.	SWITCH	TEMPERATURE RANGE (°F)	DIFFERENTIAL (°F)	SENSING ELEMENT
C12-2001	SPDT	-1 TO 59	5	30" CAP WITH 3/8" X 6" BULB

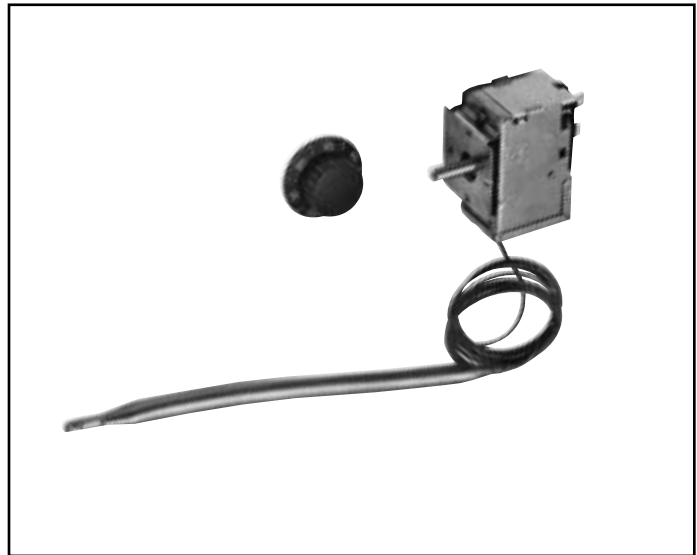

C17-100 TWO STAGE CONTROL


This control replaces many OEM controls on two-stage cooling and heat/cool units. The two SPDT switches are staged 3.5°F apart.

ELECTRICAL RATING

RATING	125V	240V	277V
FULL LOAD AMPS	20	20	16
LOCKED ROTOR AMPS	80	80	60
PILOT DUTY (VA)	240	240	240
RESISTIVE LOADS AMPS	–	–	16

ORDERING DATA

UNI-LINE ORDER NO.	SWITCH	TEMPERATURE RANGE (°F)	DIFFERENTIAL (°F)	SENSING ELEMENT
C17-100	2 SPDT	71 TO 101 (COOLING)	3.5	26" CAP WITH 3/8 X 8-9/16" BULB
		64 TO 94 (HEATING)		

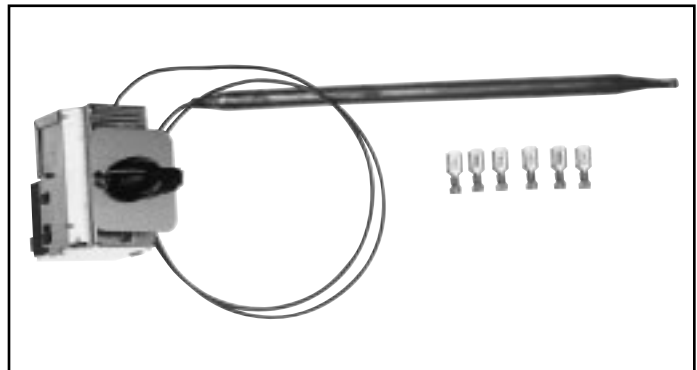

A30-X204 AIR CONDITIONER LOW AMBIENT THERMOSTAT

The control prevents the compressor from operating when outside temperatures are low. Low ambient temperature shut-off prevents damage from possible liquid return in suction lines.

ELECTRICAL RATING

RATING	24V	120V	240V	277V
FULL LOAD AMPS	–	20	20	16
LOCKED ROTOR AMPS	–	80	80	60
PILOT DUTY (VA)	240	240	240	240
RESISTIVE LOAD AMPS	–	–	–	16

ORDERING DATA

UNI-LINE ORDER NO.	SWITCH	"CUT-OUT" RANGE (°F)	DIFFERENTIAL (°F)	SENSING ELEMENT
A30-X204	SPST	50 TO 65	6	24" CAP

