


19 Series

ASME Safety Valve

SUBMITTAL SHEET

"Apollo" Flow Controls

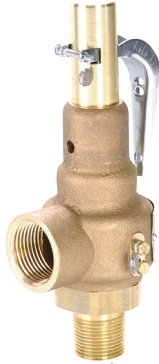

Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO#:	
Rep:	
Wholesale Dist.:	

DESCRIPTION

ASME Sections I & VIII capacity certified safety valve for overpressure protection of steam power boilers, pressure piping systems, pressure vessels, piping and similar equipment. Suitable for steam, air and non-hazardous gases.

FEATURES

- ASME Section I & VIII Certified Capacities
- 5 - 300 psig Set Pressures @ -60°F min / 406°F max
- 1/2" - 2-1/2" Inlet Connections Available
- Stainless Steel Wetted Trim Standard
- PFA and Metal Seat Styles Available
- Made in the USA

APPROVALS

- ASME Section I Power Boilers
- ASME Section VIII Div 1 Pressure Vessels
- Canadian Registration Number OG8547.5C
- Pressure Equipment Directive 2014/68/EU (PED)

**Set pressures and temperatures vary by model. Refer to catalog for sizing and selection information*

STANDARD MATERIAL LIST

BODY	ASTM B584 Bronze
NOZZLE	ASTM B16 Brass/316 SS
SPRING	Stainless Steel
SEAT	PFA Teflon/B16 Brass/316 SS

CAPACITY, LB/HR (KG/HR)

NATIONAL BOARD CAPACITY CERTIFIED, SECTION I STEAM

SET PRESSURE PSIG (BAR)	15 (1.03)	100 (6.90)	250 (17.24)
D Orifice	174 (79)	646 (293)	1494 (678)
E Orifice	310 (141)	1152 (522)	2664 (1208)
F Orifice	484 (220)	1798 (816)	4185 (1886)
G Orifice	794 (360)	2950 (1338)	6822 (3094)
H Orifice	1240 (562)	4602 (2088)	7557 (3428)
J Orifice	2035 (923)	7557 (3428)	17477 (7928)

AVAILABLE CONFIGURATIONS

MODEL NUMBER	SIZE	WEIGHT LB. (KG)	HEIGHT IN. (MM)
19*DC	1/2M x 3/4F	1.6(.73)	6.5 (165)
19*DD	3/4M x 3/4F	1.6(.73)	6.5 (165)
19*ED	3/4M x 1F	2.0(.91)	7.1 (180)
19*EE	1M x 1F	2.2(1.1)	7.1 (180)
19*FE	1M x 1-1/4F	4.1(1.9)	9.3 (236)
19*FF	1-1/4M x 1-1/4F	4.3(2.0)	9.3 (236)
19*GF	1-1/4M x 1-1/2F	7.4(3.4)	11.0 (279)
19*GG	1-1/2M x 1-1/2F	7.6(3.4)	11.0 (279)
19*HG	1-1/2M x 2F	11.5(5.2)	12.0 (305)
19*HH	2M x 2F	11.6(5.3)	12.0 (305)
19*JG	1-1/2F x 2-1/2F	20.0(9.1)	14.0(356)
19*JH	2M x 2-1/2F	19.9(9.0)	14.2 (360)
19*JJ	2-1/2M x 2-1/2F	20.8(9.4)	14.7 (373)

PART NUMBER MATRIX

19	D	C	K	165	A
SERIES NUMBER	ORIFICE LETTER	INLET SIZE	ASME CODE & SERVICE	SET PRESSURE (PSI)	SPECIAL OPTIONS
19K = Brass Trim/Teflon Seat 19M = Brass Trim/Metal Seat 19L = Stainless Trim/Teflon Seat 19S = Stainless Trim/Metal Seat	Orifice Letter from Capacity Chart	C = 1/2" D = 3/4" E = 1" F = 1-1/4" G = 1-1/2" H = 2" J = 2-1/2"	A = Sec I Steam K = Sec VIII Air L = Sec VIII Steam N = Non Code Air P = Non Code Steam		A = Anti-Vibration Trim CE = CE/PED Compliant Q = Performance (Calibration) Test Reports X = Oxygen Cleaned *other suffixes - factory issued

*Not all configurations available together

Customer Service (704) 841-6000
www.apolloflowcontrols.com

This specification is provided for reference only. Conbraco Industries Inc. reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to Conbraco products previously or subsequently sold. Please visit apolloflowcontrols.com for the most current information.

