
Pietro Fiorentini®

GOVERNOR

LINE PRESSURE REGULATOR WITH OVER PRESSURE DEVICE



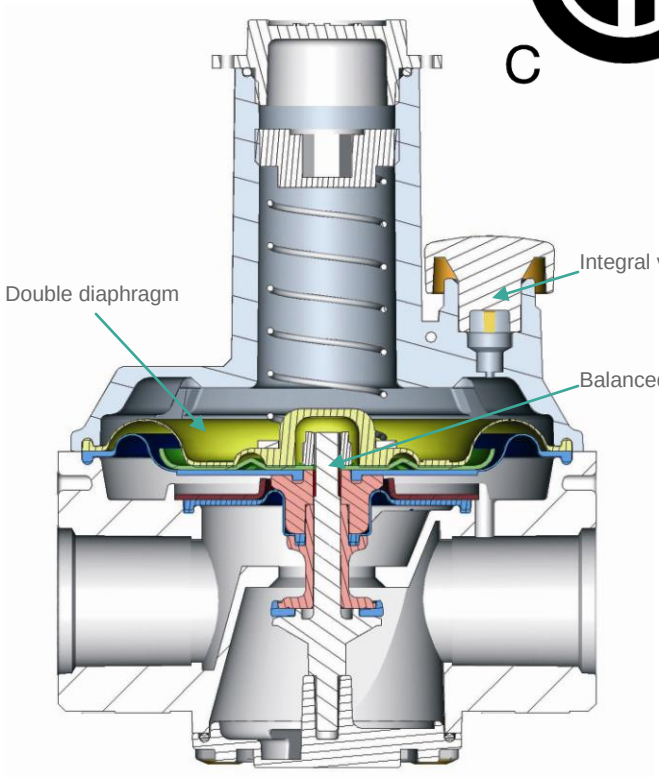

FEATURES

- **CSA Certified to ANSI Z21.80A2005**
- **CSA 6.22a-2005 Class I for outlet pressures up to 14” W.C.**
- **CSA 6.22a-2005 Class II for outlet pressures up to 1 PSIG**
- Integral Vent Limiter – no vent line required†
- Positive dead-end Lockup
- Inlet and Outlet test ports
- 500 to 1 Turndown

SPECIFICATIONS

- Suitable for use with Natural Gas, LPG, and any non corrosive clean gas
- Inlet pressure: 7” W.C. to 5 PSIG
- Outlet pressure: 4” W.C. to 1 PSIG
- Temperature range: -40°F to 150°F
- Connections: ½” thru 2”
- Maximum Emergency Inlet Exposure Pressure: 80PSIG
- Suitable for Indoor or Outdoor Installation

INSTALLATION ADVANTAGES

- Unique design eliminates the need for vent piping when performing indoor installations†
- Allows for higher capacities without costly vent lines (Vent Limiters thru 4”)
- Mounts in any position
- Reduces your cost by using smaller sizes due to our highs capacities and large turndown
- No individual vs. total load restrictions
- Epoxy coating for outdoor installation available

† Local Codes and Regulations Apply in installation

Fiorentini USA | Tollfree: 888.618.8787 | Fax: 770.448.7312 | **www.gasinside.com**

GOVERNOR LINE PRESSURE REGULATOR WITH OVER PRESSURE DEVICE

Capacity in CFH for .60 Specific Gravity Gas

	Outlet Pressure Set Point	Operating Inlet Pressure		
30051DC ½"		1 psi	2 psi	5 psi
	8" w.c.	635	928	928
	11" w.c.	628	928	928
	14" w.c.	558	936	936
30052DC ¾"	Outlet Pressure Set Point	Operating Inlet Pressure		
		1 psi	2 psi	5 psi
	8" w.c.	848	1,155	1,155
	11" w.c.	778	1,155	1,155
	14" w.c.	698	1,170	1,170
30053DC 1"	Outlet Pressure Set Point	Operating Inlet Pressure		
		1 psi	2 psi	5 psi
	8" w.c.	1,059	1,501	1,501
	11" w.c.	1,093	1,501	1,501
	14" w.c.	906	1,521	1,521
30150DC ½" High Capacity	Outlet Pressure Set Point	Operating Inlet Pressure		
		1 psi	2 psi	5 psi
	8" w.c.	1,695	2,205	2,205
	11" w.c.	1,471	2,213	2,213
	14" w.c.	1,325	2,223	2,223
30151DC ¾" High Capacity	Outlet Pressure Set Point	Operating Inlet Pressure		
		1 psi	2 psi	5 psi
	8" w.c.	2,084	2,785	2,785
	11" w.c.	1,858	2,796	2,796
	14" w.c.	1,674	2,808	2,808
30152DC 1" High Capacity	Outlet Pressure Set Point	Operating Inlet Pressure		
		1 psi	2 psi	5 psi
	8" w.c.	2,437	3,308	3,308
	11" w.c.	2,206	3,320	3,320
	14" w.c.	1,988	3,335	3,335
30153DC 1¼"	Outlet Pressure Set Point	Operating Inlet Pressure		
		1 psi	2 psi	5 psi
	8" w.c.	5,297	7,891	7,891
	11" w.c.	5,264	7,921	7,921
	14" w.c.	4,743	7,957	7,957
30154DC 1½"	Outlet Pressure Set Point	Operating Inlet Pressure		
		1 psi	2 psi	5 psi
	8" w.c.	5,650	8,240	8,240
	11" w.c.	5,496	8,270	8,270
	14" w.c.	4,952	8,308	8,308
30155DC 2"	Outlet Pressure Set Point	Operating Inlet Pressure		
		1 psi	2 psi	5 psi
	8" w.c.	10,947	15,087	15,087
	11" w.c.	10,064	15,143	15,143
	14" w.c.	9,068	15,213	15,213
30157DC 3"	Outlet Pressure Set Point	Operating Inlet Pressure		
		1 psi	2 psi	5 psi
	8" w.c.	16,810	23,202	23,202
	11" w.c.	15,715	23,308	23,308
	14" w.c.	13,768	23,406	23,406
30158DC 4"	Outlet Pressure Set Point	Operating Inlet Pressure		
		1 psi	2 psi	5 psi
	8" w.c.	29,452	40,612	40,612
	11" w.c.	27,545	40,753	40,753
	14" w.c.	24,094	40,960	40,960

For complete information on all models and options, visit our website **www.gasinside.com**

Fiorentini USA | 4555 South Berkeley Lake Road | Norcross, GA 30071

Distributed by: